



info@nexgenproductsllc.com

# NGR Option

## Remote Alarm and Strobe Light


### Features & Benefits

- Unit has a double pole single throw relay UL listed
- 24 Volt coil - connects to NG50A
- Can be remotely mounted up to 500 feet from NG50A
- Continual strobe and audible sound alerts when CO levels of CO 50 ppm has been detected by the NG50A
- Wall mount NEMA 1 screw cover junction box
- Easy to mount (indoor only)
- Electrical knock-outs provided



External Alarm and Strobe Light - This option provides audible and visual indication that carbon monoxide has exceeded 50 ppm.

### Electrical Connection Diagram

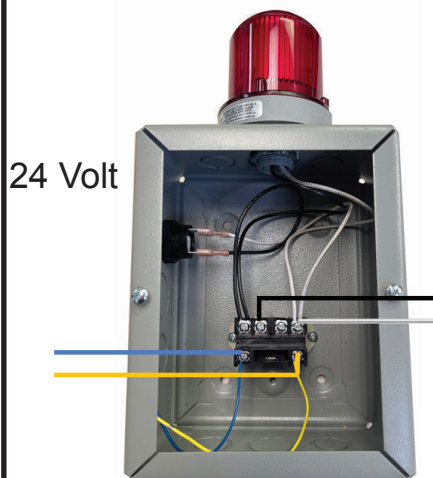

### Electrical Schematic

