



info@nexgenproductsllc.com

NGW Option

External Warning Light


Features & Benefits

- Unit provides a remote warning light when NG50A has detected carbon monoxide
- Two 24 Volt lamps for redundancy are mounted in cabinet (included)
- Can be remotely mounted up to 500 feet from NG50A
- Wall mount NEMA 1 screw cover junction box
- Easy to mount (indoor only)
- Electrical knock-outs provided



Warning light - This option provides an external remotely mounted warning light (included) which is activated by the NG50A when the unit has detected 35 ppm. The light will remain until manually cleared.

Electrical Connection Diagram

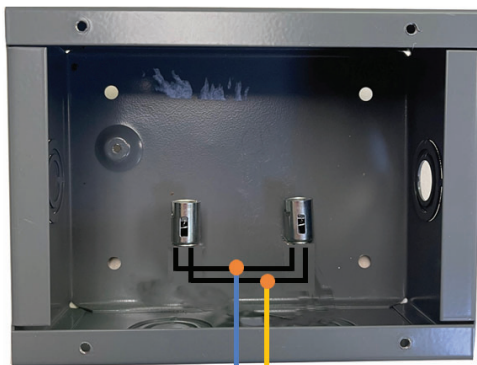

Connect to the NG50A yellow and blue terminal blocks

Screw on Face Plate

